WISCONSIN DNR LANDS TIMBER SALE MAP AND PROSPECTUS

TRACT NUMBER SALE NUMBER CONTRACTOR

1-08 (Beef)

CUTTING BOUNDARIES

North: Blue line

East: Red line

South: Red line

West: Blue line

SALE LOCATION

Section 23 Town 24N Range 6 West

Township Name: Garden Valley


Contract

Sale Size: 56 Acres

Period: 2 Years

(no extensions)

MAP SCALE: 4 inches equal 1 mile

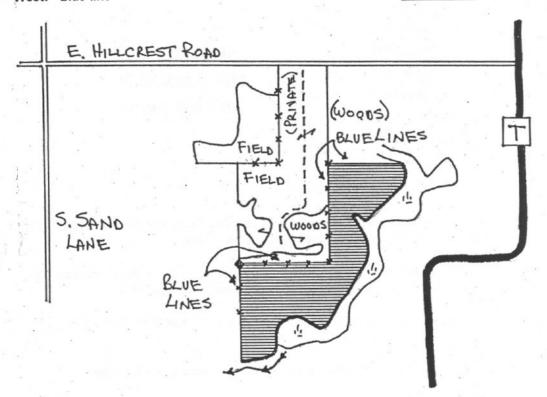

KEY

SALE AREA

- REDLINE

* FENCES

. SURVEY CORNER

--- : FIELD TRAIL

1. 4 : MARSH

STREAM

WISCON	ISIN D	NR L	ANDS	
TIMBER	SALE	MAP	AND	PROSPECTUS

TRACT NUMBER SALE NUMBER CONTRACTOR

1-08	(Beef)

CUTTING BOUNDARIES

North: Blue line

East: Red line

South: Red line

West: Blue line

SALE LOCATION

Section 23 Town 24N Range 6 West

Township Name: Garden Valley

Contract

Sale Size: 56 Acres

Period: 2 Years

(no extensions)

MAP SCALE: 4 inches equal 1 mile

PRODUCT LISTING:

	Est. Vol	Minimum	
Species	Cords	MBF	Bid
Aspen	45		\$25.08/cd
Oak	410		\$21.12/cd
Mixed Hardwoods	300	•	\$25.84/cd
Jack Pine	200		\$38.40/cd
Oak (Sawlog)		61	\$150.92/mbf
Red Maple (Sawlog)		8	\$141.86/mbf

see map on the back side of this page

SALE ACCESS: Across a privately owned farm field that is south from E. Hillcrest Road. For access contact: Wallen Capper, N6550 Riverview Dr., Black River Falls, WI 54615. Phone: (715) 284-9824.

<u>PURPOSE OF SALE</u>: Improve forest health, wildlife habitat, and timber production by harvesting all designated species to promote natural regeneration of hardwoods and convert to white pine, where possible.

DESIGNATED SPECIES TO BE CUT: Aspen, Oak, Red Maple, White Birch, Jack Pine, Red Pine, Tamarack

GENERAL CUTTING REQUIREMENTS:

- Cut designated trees with one or more 100" sticks (pulp), or with one or more 8' 6" logs (saw).
- 2. Minimum top diameters are as follows:
 - Conifer pulp 4 inches

Hardwood pulp - 5 inches

Hardwood logs - 11 inches

- 3. The following non-merchantable trees must be cut down to a 2" diameter to help achieve the sale objective: Aspen, Oak, Red Maple, White Birch, Jack Pine, Red Pine, Tamarack
- 4. All stumps shall be no higher than the stump diameter, or 10 inches, whichever is less.
- DO NOT CUT OR KNOCK DOWN DEAD TREES.

SPECIAL OPERATING REQUIREMENTS: The sale can be cut at any time of the year on dry or frozen ground. The logger will be responsible for arranging access to the tract and for repairing all private property damage, including damaged fences along property lines. Pull slash and tops back into the sale area from private property boundaries and red lines. Add red pine and tamarack to the jack pine for scaling & payment. Leave all white pine. Contract extensions beyond the 2 year contract period will not be granted.

EQUIPMENT RESTRICTIONS:

- 1. The DNR can restrict the type of equipment used on the job if conditions or damage warrant.
- 2. Road and landing locations must be approved by the DNR.
- 3. Notify the DNR before you start the job, and each time you leave or return to the job.
- 4. Check your contract for other requirements.
- Do not damage any survey corners, witness trees, or witness markers.